





OUR VISION.

NEMO® IS FOUNDED ON
A COMMITMENT TO ADVENTURE, TO THE FEARLESS
PURSUIT OF UNCHARTED PATHS, IN EVERYTHING—
FROM THE EQUIPMENT WE BUILD
TO THE WAY WE RUN OUR BUSINESS.
BRAVELY EXPLORING OPENS OUR MINDS, BRINGS US CLOSER TO
THE PEOPLE WE DEPEND ON, SHARPENS
NEW DIRECTIONS OUR WITS, AND LIFTS OUR SPIRITS.
ADVENTURE GIVES US PURPOSE AND
PERSPECTIVE. IT MAKES US
HUMBLE AND PROUD.
WE BELIEVE **MEANINGFUL ADVENTURES**
ARE POSSIBLE FOR **ANYONE, ANYWHERE.**



POSSIBLE, THAT IS, IF YOU BRING
THE WILL, THE IMAGINATION,
AND THE RIGHT GEAR.

Adventure Anywhere™





THE END OF THE BIVY

Its **cavernous interior** and ability to create a small vestibule for food prep at a paltry 1.25 lbs (650g) makes the conventional bivy sack obsolete.

Our revolutionary AirSupported Technology® inflated beam replaces a traditional pole to allow a 15 second setup and incredibly small packed size.

High performance NEMO OSMO™ Elite W/B fabric is one of the lightest weight waterproof and breathable fabrics available.

MIN WEIGHT

1 lb, 4 oz
560 g


PACKED SIZE

4 x 6 in dia
10 x 15 cm dia

FLOOR DIM

108 x 41 in
274 x 104 cm


FOR DETAILED SETUP, CARE, AND REPAIR INSTRUCTIONS, VISIT:
www.nemoequipment.com/support

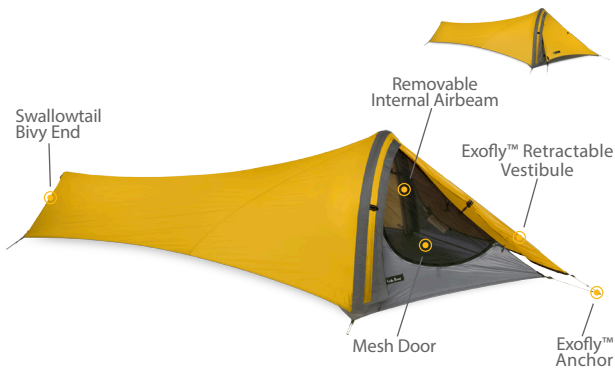

GOGO™ ELITE
1 PERSON



NEMO PRODUCT STATISTICS



Minimum Weight

1 lb, 4 oz / 650 g

Packed Weight

1 lb, 12 oz / 800 g

Packed Size

4 x 6 in dia / 10 x 15 cm dia

Frame

2 in / 5 cm dia Airbeam

Shell Fabric

10D OSMO™ Elite W/B (1,200 mm)

Vestibule Fabric

10D PU Nylon (1,500 mm)

Floor Fabric

20D PU Nylon (1,500 mm)

Floor Dimensions

108 in x 41 in / 274 cm x 104 cm

Interior Height

27 in / 69 cm

Floor Area

19 sq ft / 1.8 sq m

Vestibule Area

5 sq ft / 0.5 sq m

Included Accessories

Ultralight dry bag style stuff sack,
Ultralight Integrated Pump, stakes,
guy-out cord, repair kit



NEMO PRODUCT
INNOVATIONS




AST[®]
AIRSUPPORTED
TECHNOLOGY[®]



NEMO's AirSupported Technology[®] is a system of low pressure inflatable tubes (airbeams) and lightweight pumps. Airbeams are made of two layers like a bicycle tire: an outer layer provides the shape, strength, and puncture resistance, and a replaceable inner bladder holds the air.



1. X-Ply Fabric
2. Velcro[®] Straps for Attachment to Tent Shell
3. Bladder Access Pockets
4. Quick-Disconnect Inflation/Deflation Valve

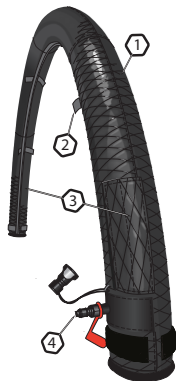

ADVANTAGES OF AST[®]

Unbreakable and stronger than aluminum poles

Fast setup in 15–45 seconds

Small and flexible packed size


GOGO[™] ELITE HIGHLIGHTS




Inflates in seconds from outside or inside so you can stay dry when the weather turns foul. After staking out your Gogo[™], get inside and take your time pumping up the airbeam.



ExoFly[™] retractable vestibule is a unique morphing vestibule. The tent is designed to store gear inside where it can stay dry and close at hand, but if you need a temporary vestibule, simply unclip and retract the inner tent from the fly.



OSMO™ Elite is one of the lightest waterproof/breathable tent fabrics on the market. The featherweight high tenacity nylon ripstop base fabric is coated with a proprietary w/b layer that enables water vapor to be transported out at an incredible rate. NEMO's ultralight 10D fabric is the lightest woven waterproof/breathable fabric currently used in the tent industry. With unprecedented tear strength and weatherproofness for its weight class, this 10D high tenacity PU coated nylon ripstop is one of the most advanced textiles in the market.



Swallowtail patterning at the foot end allows you to tension the bivy over your sleeping bag with no extra guy lines or stakes.



An ultralight dry bag style stuff sack protects your tent from taking on water weight if stowed in your backpack while hiking in the rain, or a kayak hull when you roll your boat. Alternatively, if you have to pack your tent wet, it will help keep the rest of the gear in your pack dry.





NEMO QUALITY
GUARANTEE



NEMO guarantees every product we sell. We put great effort into choosing the best materials and providing you with the highest level of workmanship. We obsess over every design decision to ensure you get the greatest comfort and protection possible. Our process begins with pencil and paper and evolves methodically through computer modeling, prototyping, testing, and development. We strive to design and build the best outdoor equipment on the planet.

NEMO products carry a lifetime warranty against defects in workmanship and materials to original owner, with proof of purchase or warranty registration. Warranted products will be replaced or repaired at NEMO's discretion. NEMO does not warranty products against normal wear and tear, unauthorized modifications or alterations, improper use, improper maintenance, misuse or neglect or if the product is used for a purpose for which it is not intended.

If you are having a problem with your NEMO product, please visit www.nemoequipment.com/support/warranty-returns/ or call NEMO Customer Service at **1-800-997-9301**.

We will do our best to see that you are satisfied with your NEMO product. Our goal is to get you back to the outdoors as quickly as possible.

Register your NEMO product for warranty online and receive a code for 10% off at the NEMO webstore!

nemoequipment.com/tent-manufacturer-warranty

Except as expressly set forth in these terms and conditions, NEMO is not liable for any direct, indirect or consequential damages arising out of or resulting from the use of a NEMO product. The warranties set forth in these terms and conditions are in lieu of all other warranties, express or implied, including without limitation, implied warranties of merchantability or fitness for a particular purpose.



LET'S GET SOCIAL #adventureanywhere



nemoequipment



@NEMO_Equipment



NEMOEquipmentInc



@nemoequipment



WARNING

Never place your stove, campfire, or other flame source in or near your tent. Never cook, light, or refuel a stove or any other heat source inside your tent. Death by suffocation and/or serious burns is possible.

Maintain adequate ventilation inside your tent at all times. Death by suffocation is possible.

Anchor your tent properly at all times to reduce the risk of loss or injury to the tent or occupants.

Carefully consider the possibility of falling rocks or tree limbs, lightning strikes, flash floods, avalanches, strong winds, and other hazards when choosing a campsite to reduce the risk of loss or injury.

If you have additional questions, please contact
NEMO Equipment, Inc. at 800-997-9301.

NOTE: All 2015 NEMO tents meet the CPAI-84 standard
for flame retardancy.



www.nemoequipment.com

©2016 NEMO Equipment, Inc.